

功能 Features

高稳定性，保证严格的真空密封
 高振动和抗冲击性能
 优良的环保能力




技术参数 Electrical Specification

项目	Model	TH 3*9
频率范围	Frequency Range	3.579545 ~ 160.000 MHz
温度频差	Frequency Tolerance	±10 ppm, ±20 ppm, ±30 ppm
工作温度范围	Operating Temp Range	-10 ℃~ +60 ℃, -20 ℃~ +70 ℃
负载电容	Load Capacitance	10 pF ~ 32 pF
激励功率	Drive Level	10uW ~ 100uW
静电容	Shunt Capacitance	5 pF max

等效阻抗 Equivalent Series Resistance(ESR)

Frequency (MHz)	Oscillation Mode	ESR (Ω)
3.57~ 5.5	Fundamental	150
5.6 ~ 6.0	Fundamental	100
6.1 ~ 10.0	Fundamental	80
10.1 ~ 12.0	Fundamental	60
12.1 ~ 16.0	Fundamental	50
16.1 ~ 30.0	Fundamental	40
26.0 ~ 36.0	3rd overtone	100
36.01 ~ 64.0	3rd overtone	80

外形尺寸 Dimensions

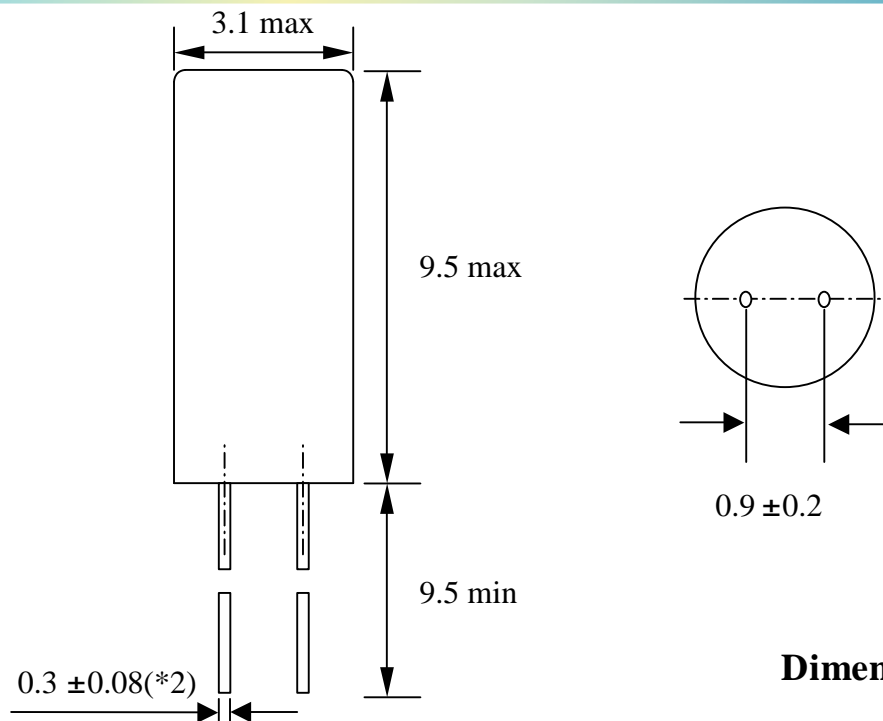

Dimensions (mm)